

TMP 100-1000-100



XY assembly

Covered stage with manual button for safe use

1 - Application

This standard economical stage is a multi-purpose product with XY, XZ or XYZ configuration. The product is fully covered for safety use. The product is drivable externally with a knurled button.

The markets targeted are industrial and academic research.

2 - Description


- Recirculating ball bearing rails
- Irreversible precision screw-nut
- Hybrid stepper motor or DC motor
- Backlash compensation
- Optical sensors
- Bare aluminum or stainless steel
- Manual drive

*All our products can be **customized** to match your exact requirements*

3 – Technical Data

CHARACTERISTIC	SPECIFICATIONS		
Travel	50 mm	100mm	200mm
Theoretical resolution	625 nm / step	625 nm / step	625 nm / step
Unidirectional repeatability	1 μ m	1 μ m	1 μ m
Max velocity	1,25 mm/s	1,25 mm/s	1,25 mm/s
Horizontal load capacity	10 kg	10 kg	10 kg
Vertical load capacity	4 kg	4 kg	4 kg
Size	225x110x50	275x110x50	360x110x50
Weight	2,5kg	2,8 kg	3,2 kg
Material	Aluminum 5083	Aluminum 5083	Aluminum 5083
Electrical specification	24 to 48 VDC, 0,4A per phase, Sub-D9 connector		
Electronic controller	C1AMPP-1C or C2-AMPP-2C		
Variant and option	<ul style="list-style-type: none"> • Linear encoder • HV, UHV, ISO6 preparation 		

3 – Dimension (mm)

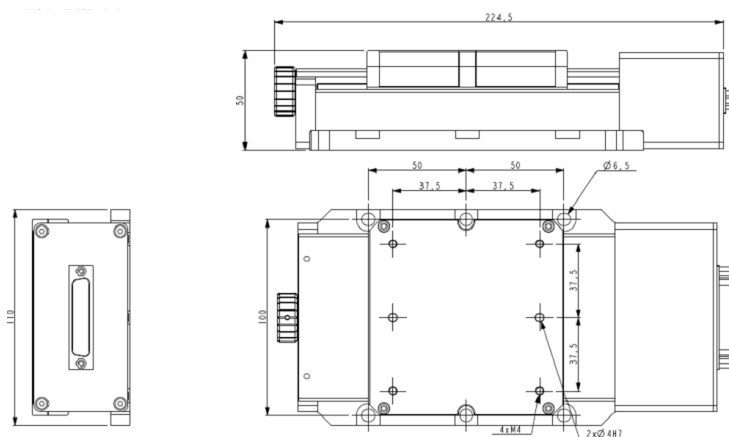

TMP 50-625-100

Note: Other information's or drawings on demand

 **ISP SYSTEM**

Z.I. de la Herray

65500 VIC-EN-BIGORRE – France



+33 (0)5 62 33 44 44



www.isp-system.fr



contact@isp-system.fr

Capital de 1 000 000 € - SIRET : 410 675 078 00027 – APE : 71128 – TVA : FR 19 410 675 078