


Update :

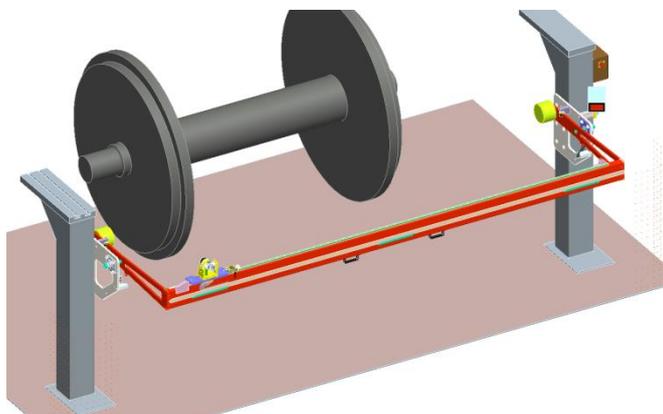

Axle in place

This equipment controls the center distance of train axle after assembly.

1 - Application



Measuring system

This equipment has optical telescopic sights (theodolite) assembled on guided carriage. The translation is controlled by measuring system.

- The measure accuracy on travel range of 3,3m is $\pm 0,05\text{mm}$.
- After use, the set is retractable upwards in order to allow the free passage to axles