


Update : 24/02/2021

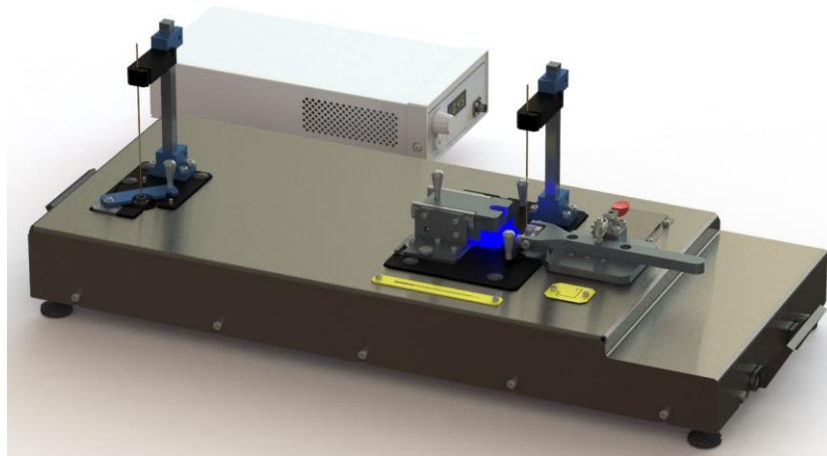

Photodiode station

Alignment & assembly station

1 - Application

The fiber optic connector assembly machine performs the following functions:


- Active alignment of an optical fiber with respect to a ferrule / lens / connector.
- Curing of the optical fiber (in ferrule and connectors) by UV diodes.

2 - Description

The ferrule clamp is indexed on a two-axis positioner allowing the optical fiber to be precisely aligned with respect to a light interface.

The axes are slaved on a light source and photodiode assembly.

The attenuation of the assembly in progress is measured in real time: during alignment, before gluing, during gluing, after gluing.

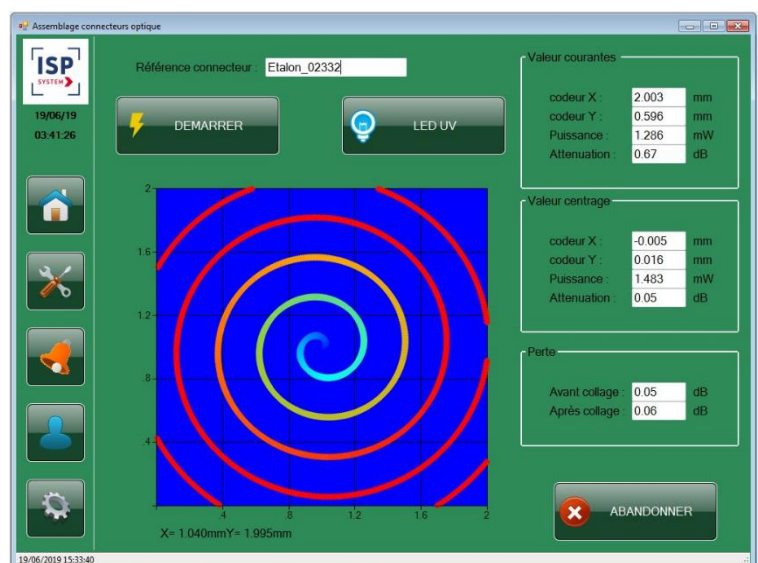


HMI view

3 – Technical data

CHARACTERISTICS	SPECIFICATIONS
Power supply:	220V single phase
Axis stroke:	± 2,5 mm
Axis resolution:	0,1 µm
Light source:	1,5 mW @1 310 nm (adaptable as needed)
Photodiode resolution:	1,2 nW @1 550 nm (adaptable as needed)
UV diodes:	1 400 mW/cm ² @365 nm
Dimensions (L x l x H) :	620 mm x 290 mm x 250 mm
Mass:	10 kg
Piloting:	By PC (software supplied)
Pilot interface:	USB

4- Dimensions (mm)

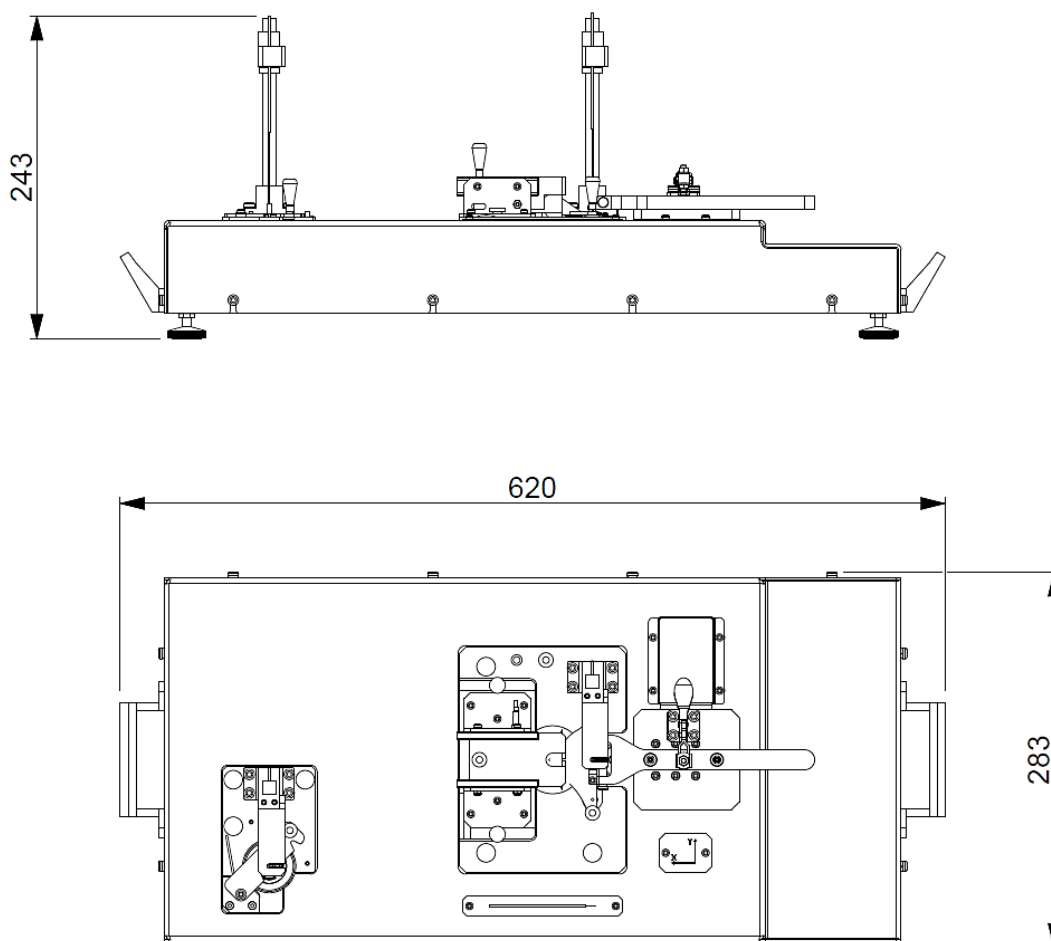

ISP SYSTEM
Z.I. de la Herray
65500 VIC-EN-BIGORRE – France

+33 (0)5 62 33 44 44
contact@isp-system.fr

www.isp-system.fr

Capital de 1 000 000 € - SIRET : 410 675 078 00027 – APE : 71128 – TVA : FR 19 410 675 078